

FEATURES:

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 100 feet
- Recyclable
- LEED points qualified
- Listed for outdoor/wet locations

TECHNICAL INFORMATION:

Sizes: 15-7/8" x 8-5/8" x 3/8"

Letter size: 7"

Background: Black, Red, Green

Illumination: High Visibility Green

Visibility: 100 feet

Directional: 2 included (Field Applied)

Construction: ABS Plastic panel/photoluminescent lettering

Durability: Explosion-proof for areas requiring explosion-proof exit signage

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through ETL;

Meets NFPA Life Safety Code 101 and OSHA requirements;

International Building Code 2009; International Fire Code 2009

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:

NO additional electrical or mechanical source required



INSTALLATION:

Surface, flag, ceiling or stem mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.


APPLICATIONS:

Both high-level and low-level

Suitable for floor proximity installation

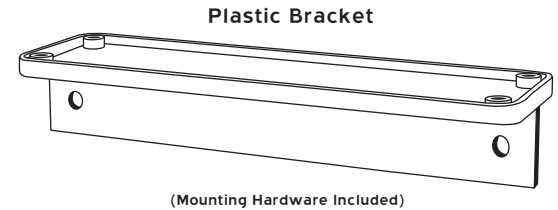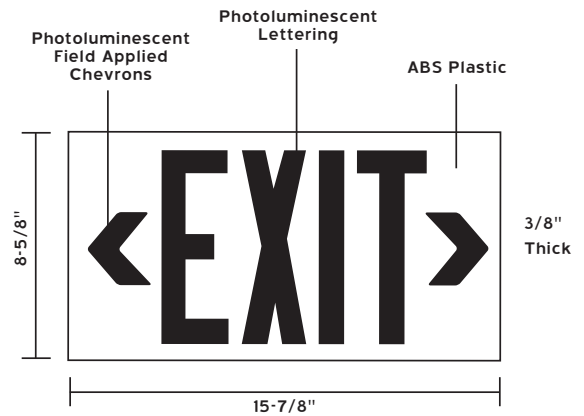

Flag Mount Option



Ceiling Mount Option